
PDF-XChange Viewer
Click to buy NOW!
www.docu-track.com

ACCESSORIES FOR PROTECTIVE MASKS



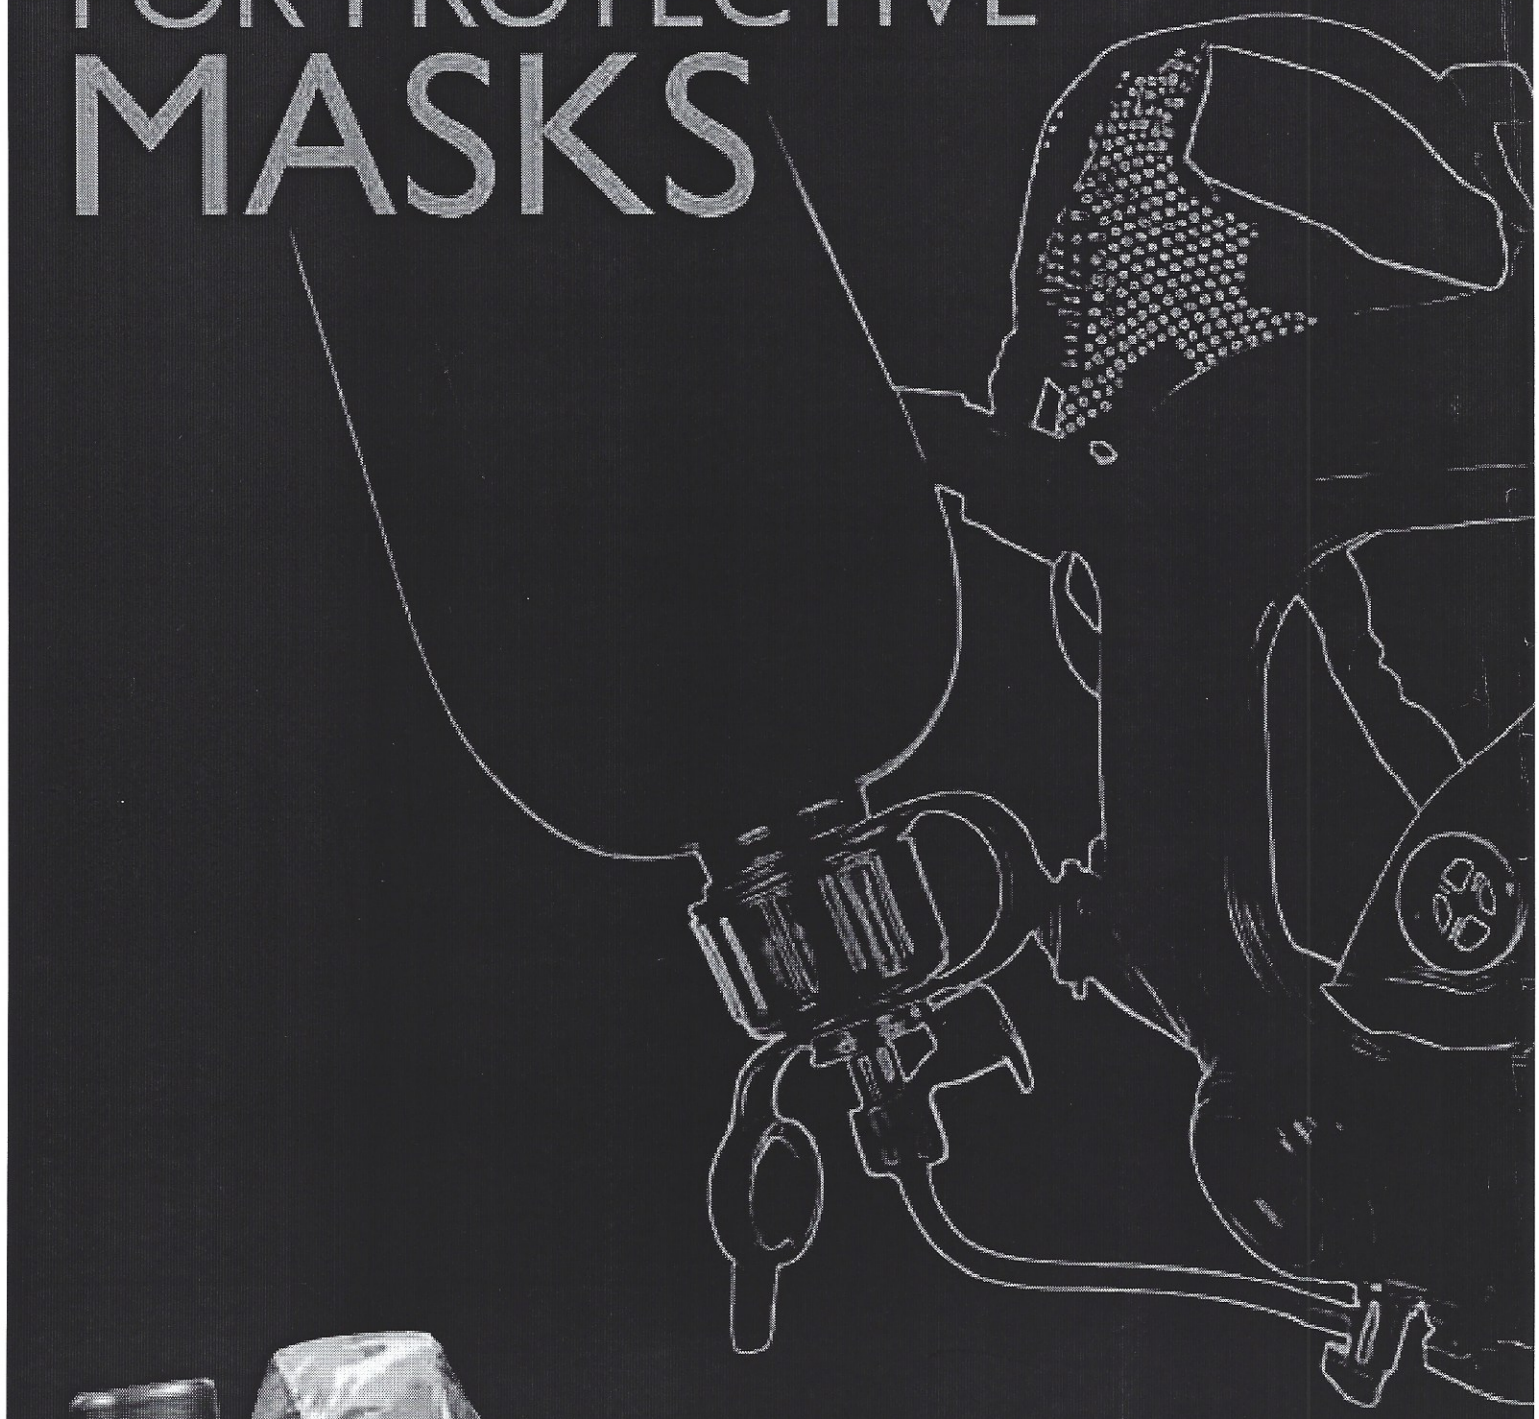

Gumárny Zubří

PDF-XChange Viewer Click to buy NOW! www.docu-track.com

ACCESSORIES FOR PROTECTIVE MASKS

Drinking system of OM-90 and CM-6M





PLASTIC BOTTLE

PE 0,8 l



BAGS



Bag for industrial type of masks.
Made from material „Kortexin 600".








Bags suitable for police use. Made from „Kortexin 600" or „Cordura".
Available in green or black colour.


FILTER

Protective Filter with 40x4 mm or 40x1/7" screw





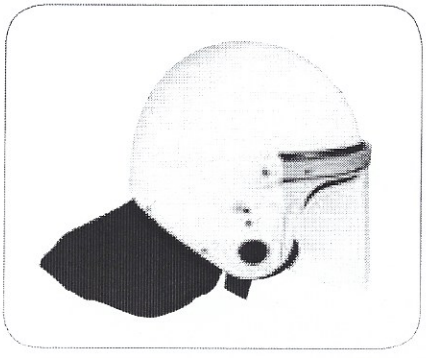

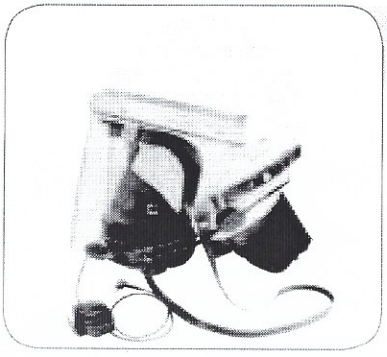

COMPATIBILITY

Police anti-riot helmet
The CM-6 Mask can be optionally fitted with two-point attachment system for use with suitable type of police anti-riot helmet.

PDF-XChange Viewer
Click to buy NOW!
www.docu-track.com
PDF-XChange Viewer
Click to buy NOW!
www.docu-track.com

SPECIAL VENTILATED ISOLATION CHEMICAL PROTECTIVE SUIT OPCH-05




Gumárny Zubří

PDF-XChange Viewer Click to buy NOW! www.docu-track.com

OPCH-05 VENTILATED ISOLATION CHEMICAL PROTECTIVE SUIT

PDF-XChange Viewer Click to buy NOW! www.docu-track.com

OPCH-05 ventilated isolation chemical protective suit was developed in co-operation with ECOPROTECT and MALINA SAFETY on request of the Czech Army, with the aim to replace the existing OPCH-90 protective suit. It is compatible with the OM-90 protective mask.

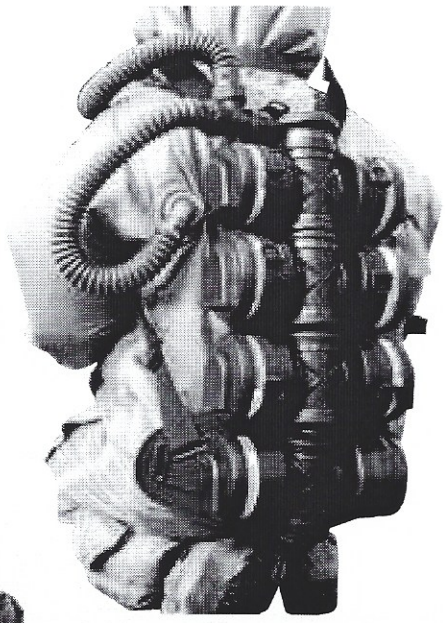

OPCH-05 is a special isolation protective suit for repeated use designed for a longterm protection of user's skin from effects of toxic agents in the form of liquids and vapours, chemical warfare agents and against penetration of radioactive dust.



With special filters, isolation breathing apparatus or external air source,
OPCH-05 can also be used in case of industrial accidents for protection against industrial toxic agents.



The set consists of two main parts – the garment and the filtration-ventilation unit (FVU).

It is possible to use the OPCH-05 protective suit without the FVU (non-ventilated variant).

TECHNICAL SPECIFICATIONS

OPCH-05 Set	**set**	**Garment**	**FVU**
Minimum and maximum air flow (8 levels)	–	–	130 to 260 l / min.
Weight (including accessories)	10,5 kg (21 kg)	5 kg (6,5 kg)	5,5 kg (14,5 kg)
Operation time at light duty	> 12 hod.	–	–
Operation time at medium duty	> 3 hod.	–	–
Battery operation time at one charge	–	–	> 200 min.
Operation temperature range	-30 °C to +50 °C	–	–

OPCH-05 resistance times against drops of toxic agents (at static conditions) at 30 °C:
Soman, Sarin, VX agent: protection for at least 8 hours
Yperit: protection for at least 5 hours

Resistance against selected industrial toxic agents at 25 °C:	
Sulphur acid 98%	>480 min
Phosphoric acid	>480 min
Sodium hydroxide	>480 min