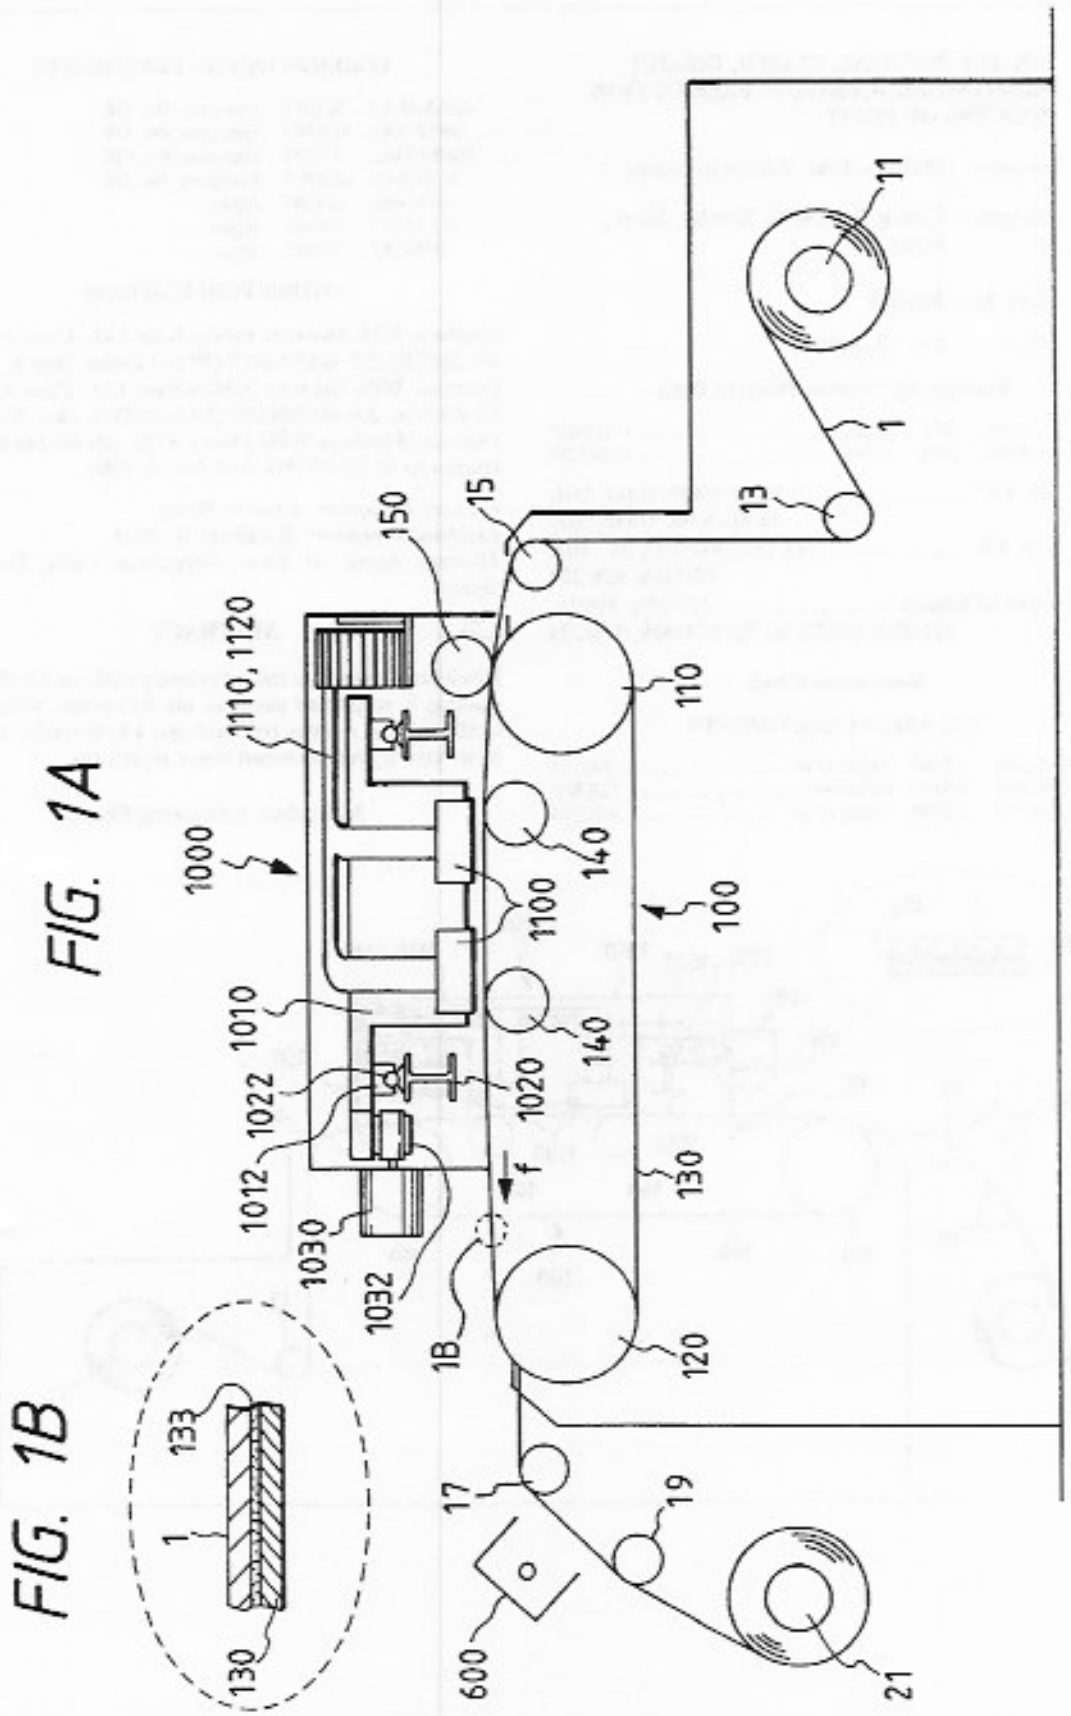
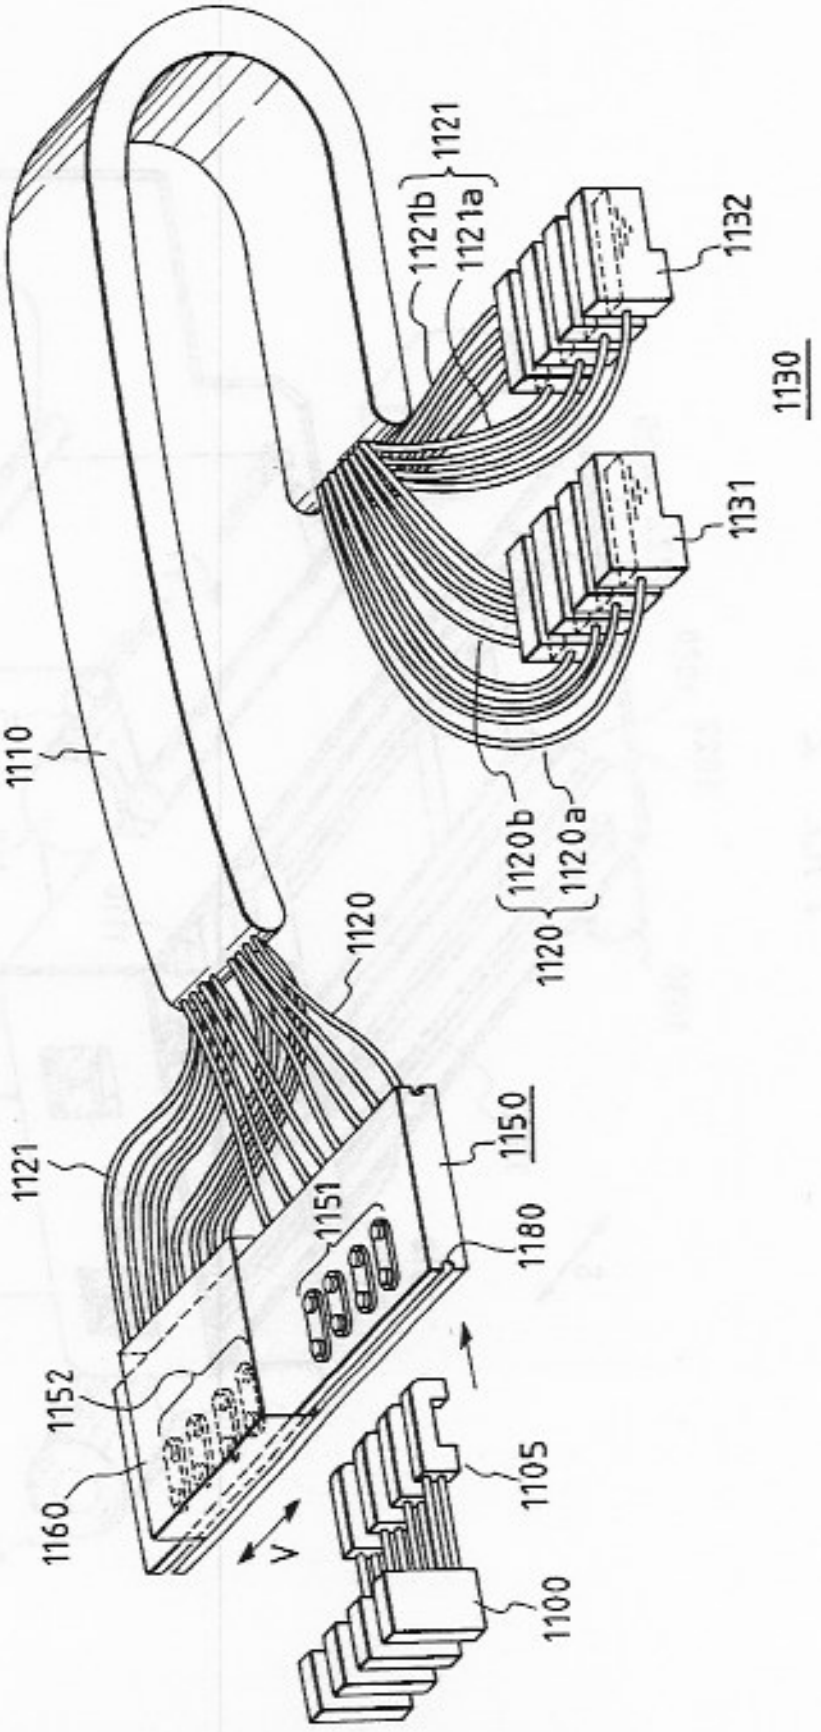

11
1
13
15
150
110
1110, 1120
1000
140
1100
100
1010
1022
1020
1012
1030
1032
1B
f
130
120
17
19
600
21

FIG. 1A

133
1
130

FIG. 1B

FIG. 3


1110
1120
1121
1121b
1121a
1132
1130
1131
1120b
1120a
1150
1151
1180
1152
1160
1105
1100
V

INK-JET PRINTING CLOTH, INK-JET PRINTING PROCESS AND PRODUCTION PROCESS OF PRINT

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an ink-jet printing cloth, an ink-jet printing process and a production process of a print.

2. Related Background Art

Besides screen printing and roller printing, ink-jet printing has heretofore been known as a process of printing on cloth formed of cotton, silk, polyester or the like. This ink-jet printing is conducted by means of an ink-jet printing apparatus obtained by improving an image-forming apparatus of an ink-jet system for forming images on recording media such as plastics and recording paper so as to be fitted for textile printing and the kind of cloth to be used.

The ink-jet system is a non-impact printing system, which ejects an ink or the like to directly apply the ink to cloth or the like and produces little noise. A textile printing apparatus equipped with an ink-jet system printing head permits high-density printing operation at high speed. The textile printing processes using a plate such as a screen or a design roller are unfit for multi-kind small-quantity production, whereas the ink-jet textile printing process is a system making no use of any plate, and permits multi-kind small-quantity production in a short period of time because data for printing can be formed with ease by a host system or the like.

The textile printing apparatus of the ink-jet system is generally equipped with a printing means (printing head) mounted on a carriage, a feeding means for feeding a cloth and control means for controlling these means. The printing head by which ink droplets are ejected through a plurality of ejection orifices is serially scanned in a direction (a main scanning direction) perpendicular to the feeding direction (a secondary scanning direction) of the cloth. On the other hand, the cloth is intermittently fed by a predetermined length at the time printing is stopped. According to this printing process, inks are ejected on the cloth according to printing signals to conduct printing. Therefore, the ink-jet printing process attracts attention as a printing method which is low in running cost and silent. When a printing head in which a plurality of ink-ejecting nozzles has been aligned in the secondary scanning direction is used, printing of a width corresponding to the number of the nozzles can be performed every time the printing head is scanned once on the cloth.

In the case of color textile printing, a color image is formed by overlapping ink droplets of plural colors ejected from respective printing heads. In general, color printing requires three or four printing heads and ink tanks corresponding to 3 primary colors of yellow (Y), magenta (M) and cyan (C) or 4 colors including black (B) in addition to these primary colors.

Since such devices are used, the techniques required of ink-jet printing are greatly different from those of screen and roller printing. This is caused by such differences in system as: the optimum value of viscosity of inks used in the ink-jet printing is greatly different from that of textile printing inks used in screen printing or the like and is low, ink-jet printing requires attention to reliability such as clogging of the head, the so-called additive color process, in which a few inks of different colors are shot on the same position so as to overlap each other, is conducted, and dots of inks are very small.

Various investigations have thus been attempted as to methods of such ink-jet printing. For example, Japanese Patent Publication No. 63-31594 discloses a method in which textile printing is conducted on a cloth containing a water-soluble polymer, a water-soluble salt and water-insoluble inorganic fine particles, and Japanese Patent Publication No. 63-31593 discloses a textile printing method in which inks each having a viscosity of 200 cP or lower and a surface tension of 30 to 70 dyn/cm are used, and a cloth having a water repellency of 50 points or more as measured in accordance with JIS L 1079 is employed.

Since the prior art printing methods described above are based on thinking that the penetration of inks into the interior of fiber is prevented to prevent the diffusion of dyes, thereby improving coloring, the improvement in coloring is recognized to some extent. However, they involve problems such as (1) it takes a long time to dry the inks, (2) no strike-through occurs because the inks do not spread, and (3) an area factor becomes small because the inks do not spread, and so coloring ability is limited.

On the other hand, for example, Japanese Patent Application Laid-Open No. 4-59282 discloses an ink-jet printing cloth obtained by incorporating 0.1 to 3% by weight of a surfactant into a cloth formed of a hydrophilic fiber material. According to the cloth subjected to such a treatment, inks are absorbed in the interior of the fiber by diffusion, and so the tendency to strike-through is enhanced. However, such a cloth is unfavorable with respect to improvement in coloring ability because dyes penetrate into the interior of the fiber.

As described above, the prior art techniques have been able to satisfy individual performance characteristics required of the ink-jet printing process for obtaining excellent prints to some extent, but have been unable to satisfy all the performance characteristics at the same time.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide an ink-jet printing cloth and an ink-jet printing process, which can provide bright prints excellent in drying property, free of bleeding and high in color depth, image quality and grade, and a production process of prints having excellent in properties.

The above object can be achieved by the present invention described below.

According to the present invention, there is thus provided an ink-jet printing cloth on which textile printing is conducted using an ink-jet system, wherein the cloth contains a water repellent and a hydrophilic agent so as to have a predetermined water repellency.

According to the present invention, there is also provided a process for producing an ink-jet printing cloth on which textile printing is conducted using an ink-jet system, which comprises the steps of:

applying a water repellent to a cloth;

drying the cloth; and

further applying a hydrophilic agent to the dry cloth.

According to the present invention, there is further provided an ink-jet printing process comprising ejecting inks by an ink-jet system to print a cloth, wherein a cloth containing a water repellent and a hydrophilic agent and having a predetermined water repellency is used as said cloth.

According to the present invention, there is still further provided a process for producing a print by applying inks to a cloth using an ink-jet system to print the cloth, which comprises the steps of:

lower alkylene glycols such as ethylene glycol, diethylene glycol, triethylene glycol and propylene glycol; lower alkyl ethers of alkylene glycols, such as ethylene glycol methyl (ethyl, propyl or butyl) ether, diethylene glycol methyl (ethyl, propyl or butyl) ether, triethylene glycol methyl (ethyl, propyl or butyl) ether, propylene glycol methyl (ethyl, propyl or butyl) ether, dipropylene glycol methyl (ethyl, propyl or butyl) ether and tripropylene glycol methyl (ethyl, propyl or butyl) ether; polyalkylene glycols such as polyethylene glycol and polypropylene glycol and products obtained by modifying one or two hydroxyl groups thereof, typified by mono- or dialkyl ethers thereof; glycerol; and thiodiglycol. Most of them are liquid, but those having a high molecular weight may be solid. However, their effect is not different from that of the liquid.

The water-soluble substance having a hydrophilic group is preferably applied in an amount of 0.01 to 50% by weight based on the cloth. If the amount exceeds 50% by weight, a change in ease of wetting can no longer be brought about, and such a great amount is not preferred from the viewpoint of economy. On the other hand, if the amount is less than 0.01% by weight, the effect of such an agent is not sufficiently exhibited.

The preferable ranges of the water repellent and hydrophilic agent to be added to the cloth are as described above. However, a ratio between the amounts of these agents to be added is important. With respect to this ratio, the amounts of the water repellent and hydrophilic agent are preferably determined in such a manner that the water repellency of the resulting cloth is less than 50 points.

The cloth according to the present invention contains the above-described substances for the purpose of adjusting its water repellency, but may also contain compounds other than these substances. Examples of the compounds usable include water-soluble inorganic salts, urea, catalysts, alkalis, acids, antireductants, antioxidants, level dyeing agents, deep dyeing agents, carriers, reducing agents, oxidizing agents and metal ions.

As compounds effective in prevention of bleeding and improvement of coloring ability, may be mentioned water-soluble inorganic salts. Examples of water-soluble inorganic salts preferably used include alkali metal salts such as NaCl, Na_2SO_4, KCl and CH_3COONa, and alkaline earth metal salts such as $CaCl_2$ and $MgCl_2$.

Urea is also very effective in preventing bleeding and improving coloring ability. In particular, its combined use with the water-soluble inorganic salt has a synergistic effect and is hence preferred.

As a method of containing the above-described substances in the cloth, any method such as padding, spraying, dipping, printing or ink-jet may be used.

A cloth may be impregnated with a treating liquid containing the water repellent and hydrophilic agent. However, when a cloth is impregnated with a treating liquid containing the water repellent so as to make the cloth resistant to penetration by inks, and then dried, followed by application of the hydrophilic agent for improving the wetting property, the treating liquid for improving the wetting property does not penetrate the interior of the fiber because the fiber is impregnated with the water repellent, and so the treating liquid adheres only to the peripheral surface of the fiber. Therefore, the wetting property of the peripheral surface of the fiber is improved. As a method of determining the wetting property where it is different for the interior of fiber transit is for the peripheral surface of the fiber, as described above, such a difference can be confirmed by conducting ink-jet printing on a cloth, observing a fiber section of the resulting print to distinguish a difference in the concentration of a fixed dye between the peripheral surface and the interior in the fiber section. More specifically, if the concentration of the fixed dye on the peripheral surface side of the fiber in the fiber structure is higher than that on the interior side of the fiber, it can be said that the wetting property of the peripheral surface of the fiber is higher than that of the interior of the fiber. On the other hand, if there is little difference in the concentration of the fixed dye between the peripheral surface and the interior of the fiber, it can be said that there is no difference in the wetting property as well.

After conducting the treatment as described above, the thus-treated cloth is finally dried and optionally cut into sizes feedable into an ink-jet apparatus, thereby providing these cut pieces as ink-jet printing cloths.

No particular limitation is imposed on textile printing inks used for the ink-jet printing cloths according to the present invention. However, when the cloth is formed of a material such as cotton or silk, ink-jet textile printing inks composed of a reactive dye and an aqueous medium are preferably used. When the cloth is formed of a material such as nylon, wool, silk or rayon, ink-jet textile printing inks composed of an acid or direct dye and an aqueous medium are preferably used. Besides, when the cloth is formed of a polyester material, ink-jet textile printing inks composed of a disperse dye and an aqueous medium are preferably used.

As specific preferable examples of these dyes, may be mentioned the following dyes. The reactive dyes include C.I. Reactive Yellow 2, 15, 37, 42, 76, 95, 168 and 175; C.I. Reactive Red 21, 22, 24, 33, 45, 111, 112, 114, 180, 218, 226, 228 and 235; C.I. Reactive Blue 15, 19, 21, 38, 49, 72, 77, 176, 203, 220, 230 and 235; C.I. Reactive Orange 5, 12, 13, 35 and 95; C.I. Reactive Brown 7, 11, 33, 37 and 46; C.I. Reactive Green 8 and 19; C.I. Reactive Violet 2, 6 and 22; C.I. Reactive Black 5, 8, 31 and 39; and the like.

The acid and direct dyes include C.I. Acid Yellow 1, 7, 11, 17, 23, 25, 36, 38, 49, 72, 110 and 127; C.I. Acid Red 1, 27, 35, 37, 57, 114, 138, 254, 257 and 274; C.I. Acid Blue 7, 9, 62, 83, 90, 112 and 185; C.I. Acid Black 26, 107, 109 and 155; C.I. Acid Orange 56, 67 and 149; C.I. Direct Yellow 12, 44, 50, 86, 106 and 142; C.I. Direct Red 79 and 80; C.I. Direct Blue 86, 106, 189 and 199; C.I. Direct Black 17, 19, 22, 51, 154, 168 and 173; C.I. Direct Orange 26 and 39; and the like.

The disperse dyes include C.I. Disperse Yellow 3, 5, 7, 33, 42, 60, 64, 79, 104, 160, 163 and 237; C.I. Disperse Red 1, 60, 135, 145, 146 and 191; C.I. Disperse Blue 56, 60, 73, 143, 158, 198, 354, 365 and 366; C.I. Disperse Black 1 and 10; C.I. Disperse Orange 30 and 73; Teraprint Red 3GN Liquid and Teraprint Black 2R; and the like.

The amount (in terms of solids) of these dyes to be used is preferably within a range of from 1 to 30% by weight based on the total weight of the ink.

As a water-soluble solvent used together with the dyes, there may be used any water-soluble solvent generally used in ink-jet inks. Preferable examples thereof include lower alkylene glycols such as ethylene glycol, diethylene glycol, triethylene glycol and propylene glycol; lower alkyl ethers of alkylene glycols, such as ethylene glycol methyl (ethyl, propyl or butyl) ether, diethylene glycol methyl (ethyl, propyl or butyl) ether, triethylene glycol methyl (ethyl, propyl or butyl) ether, propylene glycol methyl (ethyl, propyl or butyl) ether, dipropylene glycol methyl (ethyl, propyl or butyl) ether and tripropylene glycol methyl (ethyl,

printing agents used in the printing heads in the respective sets may be the same or different from each other according to the image intended to be printed, and the like. Further, printing may be made again by the printing heads of the second set on a region printed by main scanning of the printing heads of the first set (either complementary thinning-out printing or overlap printing may be conducted by the respective sets of the printing heads). Furthermore, a printing region may be allotted to each set to perform high-speed printing. Besides, the number of sets of the printing heads is not limited to two and may also be defined as one or more than two.

In these drawings, ink-jet heads, for example, bubble jet heads proposed by Canon Inc., each having a heating element which generates thermal energy causing film boiling of ink as energy used for ejecting the ink, are used as the printing heads **1100**. Each of the printing heads is used in a state that ink ejection orifices as the printing agent-applying elements have been disposed downward toward the cloth **1** substantially horizontally conveyed by the conveyance section **100**, thereby ironing out the difference in water head between the individual ejection orifices and hence making ejection conditions uniform to permit both formation of good images and even purging operation for all the ejection orifices.

A flexible cable **1110** is connected to each of the printing heads **1100** in such a manner that it follows the movement of the carriage **1010**, so that various signals such as drive signals and state signals for the head are transferred between the head and control means not illustrated. Inks are fed from an ink-feeding system **1130**, in which respective inks of different colors are contained, to the printing heads **1100** through flexible tubes **1120**.

FIG. **3** is a perspective view typically illustrating the ink-feeding system in this embodiment. The ink-feeding system **1130** is composed of two lines. More specifically, in the first line, first ink-feeding tubes **1120** respectively connected to the first set of ink-storage tanks **1131** are connected to a head joint **1150** through the flexible tube **1110**. In the second line, similarly, second ink-feeding tubes **1121** respectively connected to the second set of ink-storage tanks **1132** are connected to the head joint **1150** through the flexible tube **1110**.

Each ink-feeding tube **1120** or **1121** forms a circulation path composed of an outward ink-feeding tube **1120***a* or **1121***a* and an inward ink-feeding tube **1120***b* or **1121***b*.

The ink-storage tanks **1131** and **1132** each have a pressure pump not illustrated. The ink in the tank **1131** or **1132** is pressurized by this pressure pump so as to pass through the outward ink-feeding tube **1120***a* or **1121***a* as illustrated in FIG. **3**, circulate through the printing head **1100** and then pass through the inward ink-feeding tube **1120***b* or **1121***b*, thereby returning to the ink-storage tank **1131** or **1132**.

By this pressure pump, it is possible to recharge the inks into the ink-feeding tubes **1120** and **1121** and also to conduct a purging operation of the head by circulating the ink through the head and discharging a fraction of this ink out of nozzles in the head. The ink-storage tanks **1131** and **1132** may be provided respectively by a number corresponding to the number of the printing agents of different colors, thereby permitting color printing.

The number of the ink-storage tanks in each set may be suitably selected according to an image intended to be formed on the cloth **1**, and the like. For example, three tanks for yellow (Y), magenta (M) and cyan (C) colors, or the three primary colors for printing, or four tanks with a tank for a black (Bk) color added to these tanks may be provided. Alternatively, tanks for special colors (metallic colors such as gold and silver, and bright red, blue, etc.), which are impossible or difficult to be expressed by the three primary colors, may be used in place of or in addition to the above tanks. Further, a plurality of tanks may be used according to the color depth even if printing agents used have the same colors as each other.

The head joint **1150** is composed of a head joint **1151** for the first set indicated by a full line, a head joint **1152** for the second set indicated by a broken line and a joint cover **1160**.

The constitution of the head used in the above-described apparatus will hereinafter be described schematically with reference to FIG. **4**.

FIG. **4** is a sectional perspective view schematically illustrating the of an ink-jet head to be mounted on the ink-jet printing apparatus used in the present invention.

In this drawing, the printing head is constructed by overlapping a top plate **71** and a base plate **72**. The top plate **71** has a plurality of grooves **73**, which are to define nozzles passing an ink therethrough, a groove **74**, which is to define a common liquid chamber communicating with these grooves, and a feed opening **75** for feeding the ink to the common liquid chamber. On the other hand, the base plate **72** includes electrothermal converters **76** corresponding to the individual nozzles and electrodes **77** for supplying electric power to the electrothermal converters **76**, respectively, said electrothermal converters and electrodes being formed integrally by a film-forming technique. Ejection openings (orifices) **78** through which the ink is ejected are defined by overlapping the top plate **71** and the base plate **72** as described above.

Here, the process of forming ink droplets by the bubble jet system, which is carried out by the above-described printing head, will be described simply.

When a heating resistor (heater) reaches a predetermined temperature, such a filmy bubble as covers a heater surface is first formed. The internal pressure of this bubble is very high, and so an ink within a nozzle is forced out. The ink is moved toward the outside of the nozzle and the interior of the common liquid chamber by inertia force by this forcing out. When the movement of the ink is facilitated, the moving speed of the ink within the nozzle becomes slow because the internal pressure of the bubble turns negative pressure, and flow path resistance also arises in addition. Since the ink portion ejected out of the ejection opening (orifice) is faster in moving speed than the ink within the nozzle, it is constricted by the balance among inertia force, flow path resistance, shrinkage of the bubble and surface tension of the ink, whereby the ink portion is separated into a droplet. At the same time as the shrinkage of the bubble, the ink is fed to the nozzle from the common liquid chamber by capillary force to wait for the next pulse.

As described above, the printing head (hereinafter may be referred to as an ink-jet head), in which the electrothermal converter is used as an energy-generating means (hereinafter may be referred to as an energy-generating element), can generate a bubble in the ink within the flow path in one-to-one correspondence in accordance with a driving electrical pulse signal and also immediately and appropriately cause the growth/shrinkage of the bubble, and so the ejection of ink droplets can be achieved with excellent responsiveness in particular. The printing head is advantageous in that it can also be made compact with ease, merits of IC techniques and macro processing techniques in the recent semiconductor field, which are remarkable for advances in technique and

TABLE 1-continued

	Cloth	Pretreatment Agent [conc. in aq. solution (%)]	Ink	Water repellency	Resistance to bleeding	Color depth	Drying property
		Na_2SO_4 [4], urea [4], Na_2CO_3 [2]					
Ex. 6	Nylon	Water repellent 1 [3], Surfactant 1 [1]	Acid	0	A	A	A
Ex. 7	Nylon	Water repellent 2 [3], Surfactant 1 [1]	Acid	0	A	A	A
Ex. 8	Nylon	Water repellent 1 [3], Surfactant 1 [1], Na_2SO_4 [4]	Acid	0	A	A	A
Ex. 9	Nylon	Water repellent 2 [3], Surfactant 1 [1], Na_2SO_4 [4]	Acid	0	A	A	A
Ex. 10	Polyester	Water repellent 2 [3], Hydrophilic substance 1 [5]	Disperse	0	A	A	A
Ex. 11	Polyester	Water repellent 2 [3], Surfactant 1 [1]	Disperse	0	A	A	A
Ex. 12	Polyester	Water repellent 2 [3], Surfactant 2 [1]	Disperse	0	A	A	A

Water repellent 1: Paragium SS (trade name, paraffinic softening water repellent, product of Ohara Paragium Chemical Co., Ltd.).
Water repellent 2: Zeban F-1 (trade name, fluorine-containing type water repellent, product of Ipposha Oil Industries Co., Ltd.).
Surfactant 1: Noigen HC (trade name, nonionic surfactant, product of Dai-ichi Kogyo Seiyaku Co., Ltd.).
Surfactant 2: Neocall SW (trade name, anionic surfactant, product of Dai-ichi Kogyo Seiyaku Co., Ltd.).
Hydrophilic substance 1: Triethylene glycol butyl ether.

TABLE 2

	Cloth	Pretreatment Agent [conc. in aq. solution (%)]	Ink	Water repellency	Resistance to bleeding	Color depth	Drying property
Comp. Ex. 1	Cotton	Na_2CO_3 [2]	Reactive	0	C	C	A
Comp. Ex. 2	Cotton	Water repellent 1 [1], Na_2CO_3 [2]	Reactive	70	A	C	C
Comp. Ex. 3	Cotton	Water repellent 2 [1], Na_2CO_3 [2]	Reactive	90	A	C	C
Comp. Ex. 4	Cotton	Hydrophilic substance 1 [5], Na_2CO_3 [2]	Reactive	0	C	B	A
Comp. Ex. 5	Cotton	Surfactant 1 [1], Na_2CO_3 [2]	Reactive	0	C	C	A
Comp. Ex. 6	Cotton	Surfactant 2 [1], Na_2CO_3 [2]	Reactive	0	C	C	A
Comp. Ex. 7	Nylon	Surfactant 1 [1]	Acid	0	C	C	A
Comp. Ex. 8	Nylon	Hydrophilic substance 1 [5]	Acid	0	C	C	A
Comp. Ex. 9	Nylon	Water repellent 1 [1]	Acid	50	A	C	C
Comp. Ex. 10	Polyester	Surfactant 1 [1]	Disperse	0	C	C	A
Comp. Ex. 11	Polyester	Hydrophilic substance 1 [5]	Disperse	0	C	B	A

Water repellent 1: Paragium SS (trade name, paraffinic softening water repellent, product of Ohara Paragium Chemical Co., Ltd.).
Water repellent 2: Zeban F-1 (trade name, fluorine-containing type water repellent, product of Ipposha Oil Industries Co., Ltd.).
Surfactant 1: Noigen HC (trade name, nonionic surfactant, product of Dai-ichi Kogyo Seiyaku Co., Ltd.).
Surfactant 2: Neocall SW (trade name, anionic surfactant, product of Dai-ichi Kogyo Seiyaku Co., Ltd.).
Hydrophilic substance 1: Triethylene glycol butyl ether.

As apparent from Tables 1 and 2, all the prints according to Examples 1 to 12 were free of bleeding, high in color depth and also excellent in drying property. In particular, the cloth with urea and inorganic salts added thereto described in Example 5 was excellent in resistance to bleeding and coloring ability, whereas the cloths according to Comparative Examples 1 to 11 gave unfavorable results such as low color depth, poor drying property and/or the like.

Examples 13 to 27 and Comparative Examples 12 to 19

Prints were produced in the same manner as in Examples 1 to 12 except that the following fabrics were used as ink-jet printing cloths.

Using a 100% cotton broadcloth (mercerized product), a 100% nylon taffeta fabric and a 100% polyester crepe de Chine, pretreatments 1 using their corresponding agents shown in Tables 3 and 4 were conducted by the padding process. The thus-pretreated fabrics were then squeezed to a pickup of 70% by a mangle and dried at a drying temperature of 120° C. for 2 minutes. The thus-treated fabrics were further subjected to pretreatments 2 using their corresponding agents shown in Tables 3 and 4 were conducted similarly by the padding process. The thus-pretreated fabrics were then squeezed to a pickup of 70% by a mangle and dried at a drying temperature of 120° C. for 2 minutes. Besides the formulations according to the examples as the pretreatment formulations, treatment formulations according to the com-

TABLE 4-continued

	Cloth	Pretreatment 1 Agent/conc. in aq. soln. (%)	Cont. angle	Pretreatment 2 Agent/conc. in aq. soln. (%)	Cont. Angle	Ink	Bleeding	OD	Strike-through	Drying prop.	Dye Distr.	Water repell.
Ex. 26	Polyester	Water repell. 3/1	G	Surfactant 1/1	S	Disperse	A	A	A	A	A	0
Ex. 27	Polyester	Water-soluble polymer 1/3	G	Surfactant 1/1	S	Disperse	A	A	A	A	A	0

TABLE 5

	Cloth	Pretreatment 1 Agent/conc. in aq. soln. (%)	Cont. angle	Pretreatment 2 Agent/conc. in aq. soln. (%)	Cont. Angle	Ink	Bleeding	OD	Strike-through	Drying prop.	Dye Distr.	Water repell.
Comp. Ex. 12	Cotton	Na_2CO_3/2	S	Not conducted	—	Reactive	C	C	B	A	C	0
Comp. Ex. 13	Cotton	Water repell. 1/1, Na_2CO_3/2	G	Not conducted	—	Reactive	A	B	C	C	B	70
Comp. Ex. 14	Cotton	Water repell. 1/1 Na_2CO_3/2	G	Water repell. 1/1, Na_2CO_3/2	G	Reactive	A	B	C	C	B	70
Comp. Ex. 15	Cotton	Surfactant 1/1, Na_2CO_3/2	S	Not conducted	—	Reactive	C	C	B	A	C	70
Comp. Ex. 16	Nylon	Water repell. 1/1	G	Not conducted	—	Acid	A	B	C	C	B	80
Comp. Ex. 17	Nylon	Surfactant 1/1	S	Not conducted	—	Acid	C	C	B	A	C	0
Comp. Ex. 18	Polyester	Water repell. 1/1	G	Not conducted	—	Disperse	A	B	C	C	B	80
Comp. Ex. 19	Polyester	Surfactant 1/1	S	Not conducted	—	Disperse	C	C	B	A	C	0

(Note)

Water repellent 1: Sumifluoil EM51 (trade name, fluorine-containing type water repellent, product of Sumitomo Chemical Co., Ltd.).

Water repellent 2: TSW831/CW80 (trade name, silicone type water repellent, product of Toshiba Silicone Co., Ltd.).

Water repellent 3: Paraguard 519Z (trade name, reactive fluororesin type water repellent, product of Ohara Paragium Chemical Co., Ltd.).

Surfactant 1: Noigen HC (trade name, nonionic surfactant, product of Dai-ichi Kogyo Seiyaku Co., Ltd.).

Surfactant 2: Neocall SW (trade name, anionic surfactant, product of Dai-ichi Kogyo Seiyaku Co., Ltd.).

Surfactant 3: Migregirl GWL (trade name, nonionic surfactant, product of Senka K.K.).

Water-soluble polymer 1: Carboxymethylcellulose.

Cationic substance 1: Sanfix PRO (trade name, polyamine type, product of Sanyo Chemical Industries, Ltd.).

As apparent from Tables 3 to 5, all the prints according to Examples 13 to 27 were free of bleeding, high in color depth on the front surfaces and excellent in tendency to strike-through and drying property, whereas the cloths according to Comparative Examples 12 to 19 could not satisfy all the performance properties at the same time.

In the prior art, it has been said that coloring ability and resistance to bleeding, and tendency to strike-through are contradictory properties, and hence difficult to satisfy at the same time. However, according to the present invention, it has been possible to satisfy all properties of coloring ability, resistance to bleeding, tendency to strike-through and ink-drying property at the same time by causing the permeability or wetting property to inks of the fiber structure to differ between the interior and peripheral surface thereof as described above. In the present invention, the terms "permeability" and "wetting property" are used as substantial synonyms. However, they are sometimes used each in its proper way for ease of understanding. The term "peripheral surface" means fiber surface, i.e., an outer periphery in section of a fiber. For example, if a fiber structure is made resistant to wetting (difficult to be permeated) by an ink on the interior side thereof and, easy to be wetted (easy to be permeated) by the ink on the periphery side thereof like the present invention, the ink impacted on the cloth by ink-jet printing can easily spread in the peripheral direction of the fiber, but is not easily absorbed in the interior (thickness) direction. In such a case, the ink diffuses into the peripheral surface of the fiber and is almost not present in the interior thereof. Such a state is equal, as to the prevention of the diffusion into the interior, to the method in the prior art technique that "the penetration of inks into the interior of fiber is prevented to prevent the diffusion of dyes". However, they differ as to whether the dye diffuses into the peripheral surface of the fiber or not. In the prior art technique, it is difficult for the cloth to be permeated or wetted in both the interior and the peripheral sides of the fiber. Therefore, the inks do not also spread in the peripheral direction of the fiber. Due to this difference in "the spreading in the peripheral direction of the fiber", the prior art technique has provided a cloth failing to satisfy the coloring ability and having poor tendency to strike-through. To the contrary, when the present invention is applied, the area factor becomes great, the coloring ability is enhanced, and the tendency to strike-through is improved because the ink goes along the peripheral surface of the fiber to the back surface.

On the other hand, when compared with the method of the prior art technique that "a surfactant is contained in fiber to absorb inks in the interior of the fiber by diffusion", this prior

26. The process according to claim 24, wherein a cloth having a water repellency less than 50 marks in terms of the water repellency prescribed by the water repellency test with a spray method described in JIS L 1092 is used.

27. The process according to claim 24, wherein the water repellent is any of paraffinic and fluorine-containing type water repellents.

28. The process according to claim 24, wherein the water repellent is applied in an amount of 0.05 to 40% by weight based on the cloth.

29. The process according to claim 24, wherein the hydrophilic agent is applied in an amount of 0.01 to 50% by weight based on the cloth.

30. The process according to claim 24, wherein the cloth contains at least one of a water-soluble inorganic salt and urea.

31. The ink-jet printing cloth according to claim 2, wherein the water repellent is any of paraffinic and fluorine-containing type water repellents.

32. An ink-jet printing cloth on which printing is conducted using an ink-jet system, wherein the cloth contains a water repellent and a hydrophilic agent which tends to make an ink spread laterally on the cloth and the cloth has a predetermined water repellency.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 5,867,197

DATED : February 2, 1999

INVENTOR(S) : MAKOTO AOKI

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 11:

Line 31, "inks" should read --inks:--.

Signed and Sealed this

Twenty-first Day of September, 1999

Attest:

Q. TODD DICKINSON

Attesting Officer

Acting Commissioner of Patents and Trademarks